

AD-A067 053

NAVY ELECTRONICS LAB SAN DIEGO CALIF
PAIR (AN/SQQ-23) RECEIVING HYDROPHONE STAVE SERIAL NUMBER 2.(U)
APR 66 D A PIERCE
NEL-TM-1053

F/G 9/1

UNCLASSIFIED


NL

1 OF 1
AD A
067053



END
DATE
FILMED

6-79
DDC

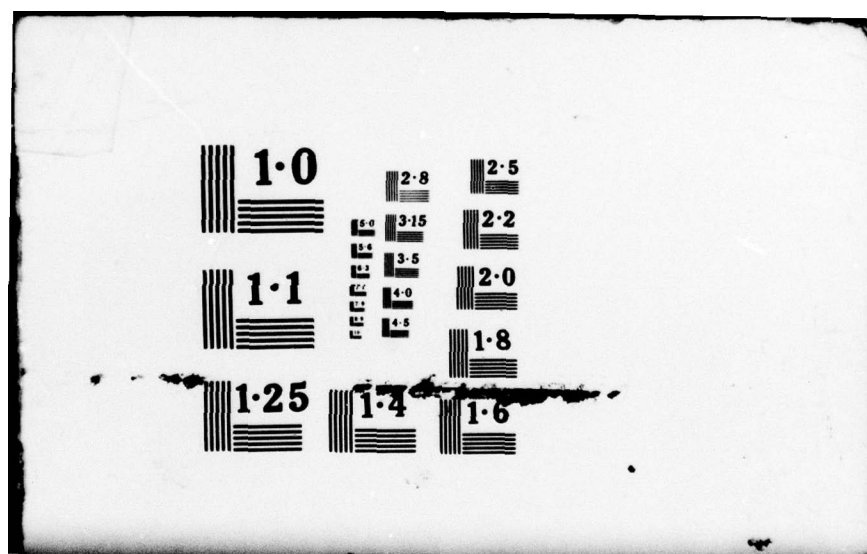

UNCLASSIFIED

~~CONFIDENTIAL~~

U. S. NAVY ELECTRONICS LABORATORY, SAN DIEGO, CALIFORNIA

UNCLASSIFIED

This is a working paper giving tentative information about some work in progress at NEL.

If cited in the literature the information is to be identified as tentative and unpublished.

LEVEL II

MOST Project -4

AD A0 67053

NEL/Technical Memorandum 1053

TECHNICAL MEMORANDUM TM-1053

PAIR (AN/SQQ-23) RECEIVING HYDROPHONE STAVE SERIAL NO. 2 (U)

Apr 11 1966

D. A. Pierce (NEL Code 3160)

DDC
RECEIVED
APR 6 1979
F

S27-20(8573)
NEL J71471

NEL/Technical Memorandum 1053

DISTRIBUTION STATEMENT A

Approved for public release;
Distribution Unlimited

10

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18, U.S.C., Sections 793 and 794. The transmission or the revelation of its contents, in any manner to an unauthorized person, is prohibited by law.

Extracts from this publication may be made to facilitate the preparation of other Department of Defense Publications. It is forbidden to make extracts for any other purpose without the specific approval of the Chief of the Bureau of Ships, except as provided for in the U. S. Navy Security Manual for Classified Matter.

DOWNGRADED AT 3-YEAR INTERVALS

DECLASSIFIED AFTER 12 YEARS

DOD DIR 5200.10

~~CONFIDENTIAL~~

UNCLASSIFIED

UNCLASSIFIED

DDC FILE COPY

UNCLASSIFIED
~~CONFIDENTIAL~~

NEL Technical Memorandum
Number 1053

9 Technical memo.

14 NEL-TM-1053

6 PAIR (AN/SQQ-23) Receiving Hydrophone
Stave Serial ~~10~~ 2 .

by

Number

10 D. A./Pierce

Code 3160

U. S. Navy Electronics Laboratory
San Diego, California 92152

11 Apr ~~1966~~ 66

12 10 p.

| | |
|---------------------------------|---|
| ACCESSION for | |
| NTIS | White Section <input checked="" type="checkbox"/> |
| DOC | Buff Section <input type="checkbox"/> |
| UNANNOUNCED | <input type="checkbox"/> |
| JUSTIFICATION | |
| <i>Letter on file</i> | |
| BY | |
| DISTRIBUTION/AVAILABILITY CODES | |
| Dist. | AVAIL. and/or SPECIAL |
| A | |

→ This technical memorandum represents a portion of the work being done on NEL Problem J714, AN/SQS-23 Performance and Integration Retrofit (PAIR) Program. It should not be construed as a formal report as its primary intent is to present some of the problems confronting project personnel and some of the preliminary conclusions. While it was originally published in a different form, it is now being included in the technical memorandum series for sake of documentation uniformity and control. Limited outside distribution is intended.

GROUP-4
DOWNGRADED AT 3-YEAR INTERVALS
DECLASSIFIED AFTER 12 YEARS
DOD DIR 5200.10

253 550

Jmi

~~CONFIDENTIAL~~
UNCLASSIFIED page 1

UNCLASSIFIED
~~CONFIDENTIAL~~

C O N T E N T S

Report No. 5308


PAIR Receiving Hydrophone Stave
Serial No. 2

| | Page No. |
|-----------------------------|----------|
| Coordinate Diagram ----- | 3 |
| Photograph ----- | 4 |
| Receiving Response ----- | 5 |
| Effect on Sound Field ----- | 6 |
| Directivity Patterns: | |
| Horizontal ----- | 7 |
| Vertical ----- | 8 |
| Complex Impedance ----- | 9 |

UNCLASSIFIED
~~CONFIDENTIAL~~

CONFIDENTIAL

TRANSDUCER COORDINATE
DIAGRAM

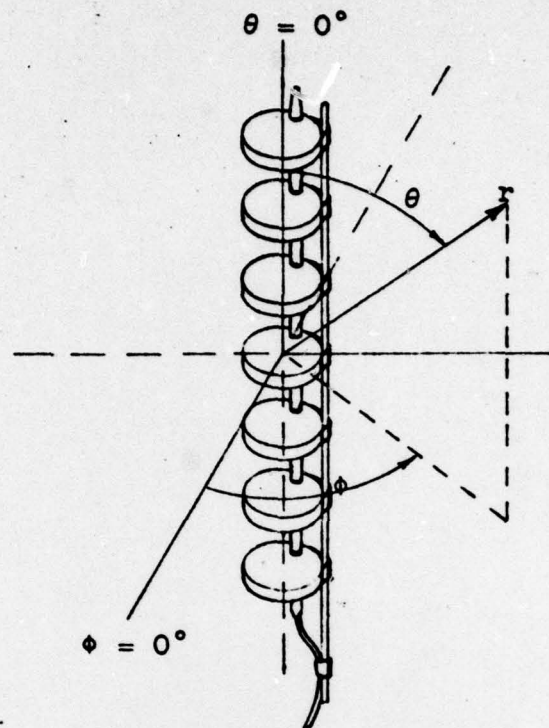

The spherical coordinate system is used to define the angles in the directivity pattern: θ and ϕ shown in the above diagram give the directions in which the response is measured. The transducer is placed in the frame of reference with its axis of symmetry coincident with $\theta = 0^\circ$, its fiducial mark in the $\phi = 0^\circ$ plane, and its center at $r = 0$.

The two patterns most frequently measured are:

- (1) those made by holding ϕ constant at some angle and rotating θ through 360° .


($\phi = a^\circ$; rotate θ)

- (2) those made by holding θ constant at some angle and rotating ϕ through 360° .

($\theta = b^\circ$; rotate ϕ)

CONFIDENTIAL

CONFIDENTIAL

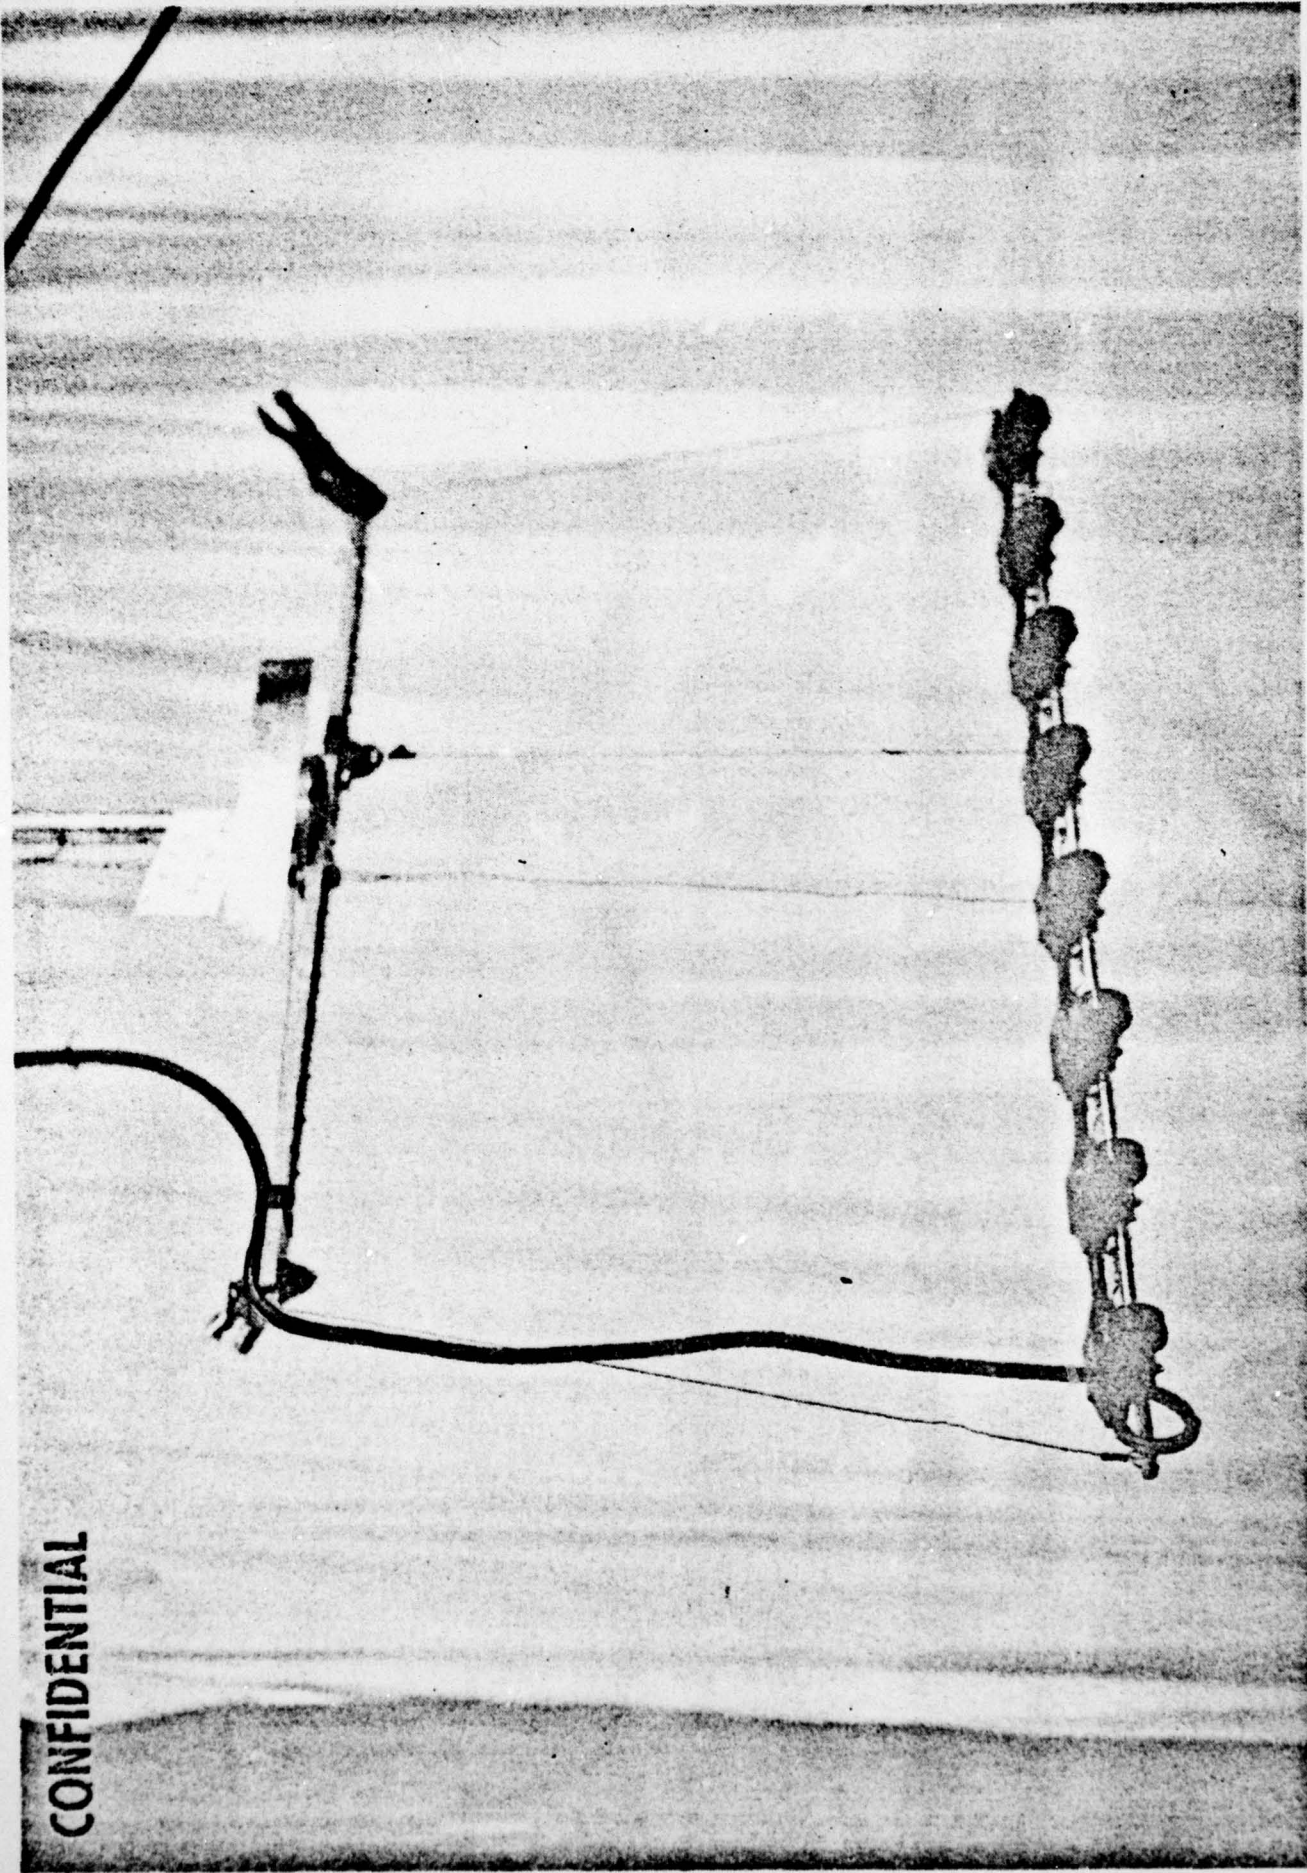

MOUNTED FOR VERTICAL PATTERNS

CONFIDENTIAL

KOE 10 X 10 10 1/2 INCH
7 X 10 IN ALUMINUM
46 1327
MADE IN U.S.A.
KEUPPEL & ESSER CO.

CONFIDENTIAL

Measured at TRANSDEC
14 March 1966

U.S. NAVY ELECTRONICS LABORATORY
Transducer Calibration Facility
San Diego, California 92152

RECEIVING RESPONSE of PAIR Receiving Hydrophone Stave
Serial No. 2

Temperature: 14°C
Depth: 5.7 meters

Open-circuit voltage measured
at the end of approx. 50 feet
of 4 conductor shielded cable,
supplied with unit.

db below 1 volt/microbar

100

110

Frequency in Kc

T577 R1

1

2

3

4

5

6

CONFIDENTIAL

CONFIDENTIAL

Measured at TRANSDEC
14 March 1966

U.S. NAVY ELECTRONICS LABORATORY
Transducer Calibration Facility
San Diego, California 92152

EFFECT of PAIR Receiving Hydrophone Stave on SOUND FIELD
Serial No. 2

Temperature: 14°C
Depth: 5.7 meters

--- BP2R1 probe without Stave.
--- BP2R1 probe next to one
element in Stave.

+10

db


-10

Frequency in Kc

T577 RS

CONFIDENTIAL

CONFIDENTIAL

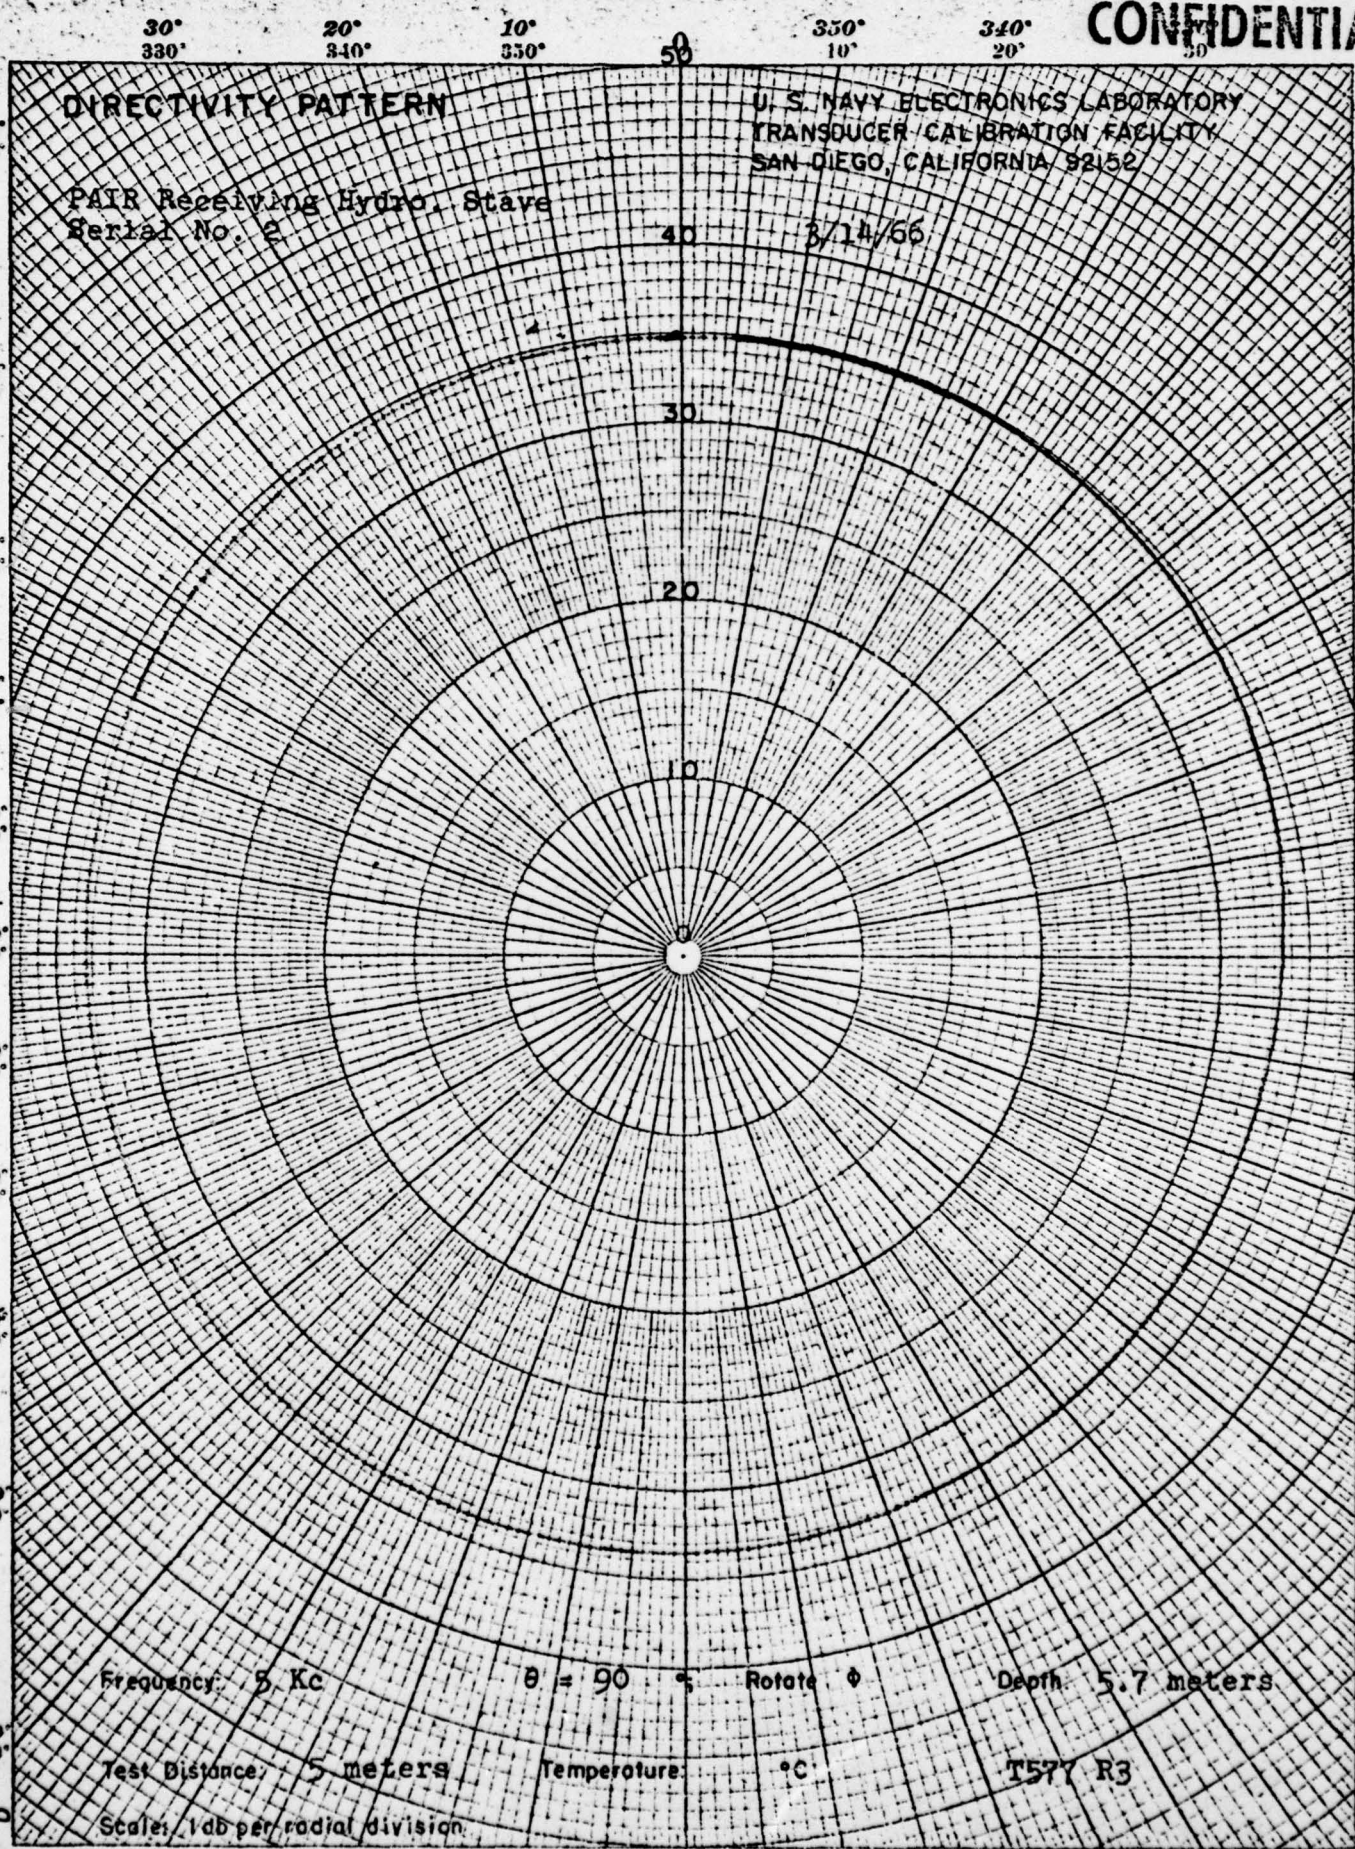

11ND-NET-3900/22 (REV 7-64)

CONFIDENTIAL

30°
330°20°
340°10°
350°

50


350°
10°340°
20°

CONFIDENTIAL

DIRECTIVITY PATTERN

U. S. NAVY ELECTRONICS LABORATORY
TRANSDUCER CALIBRATION FACILITY
SAN DIEGO, CALIFORNIA 92152PAIR Receiving Hydro. Stave
Serial No. 2

3/14/66

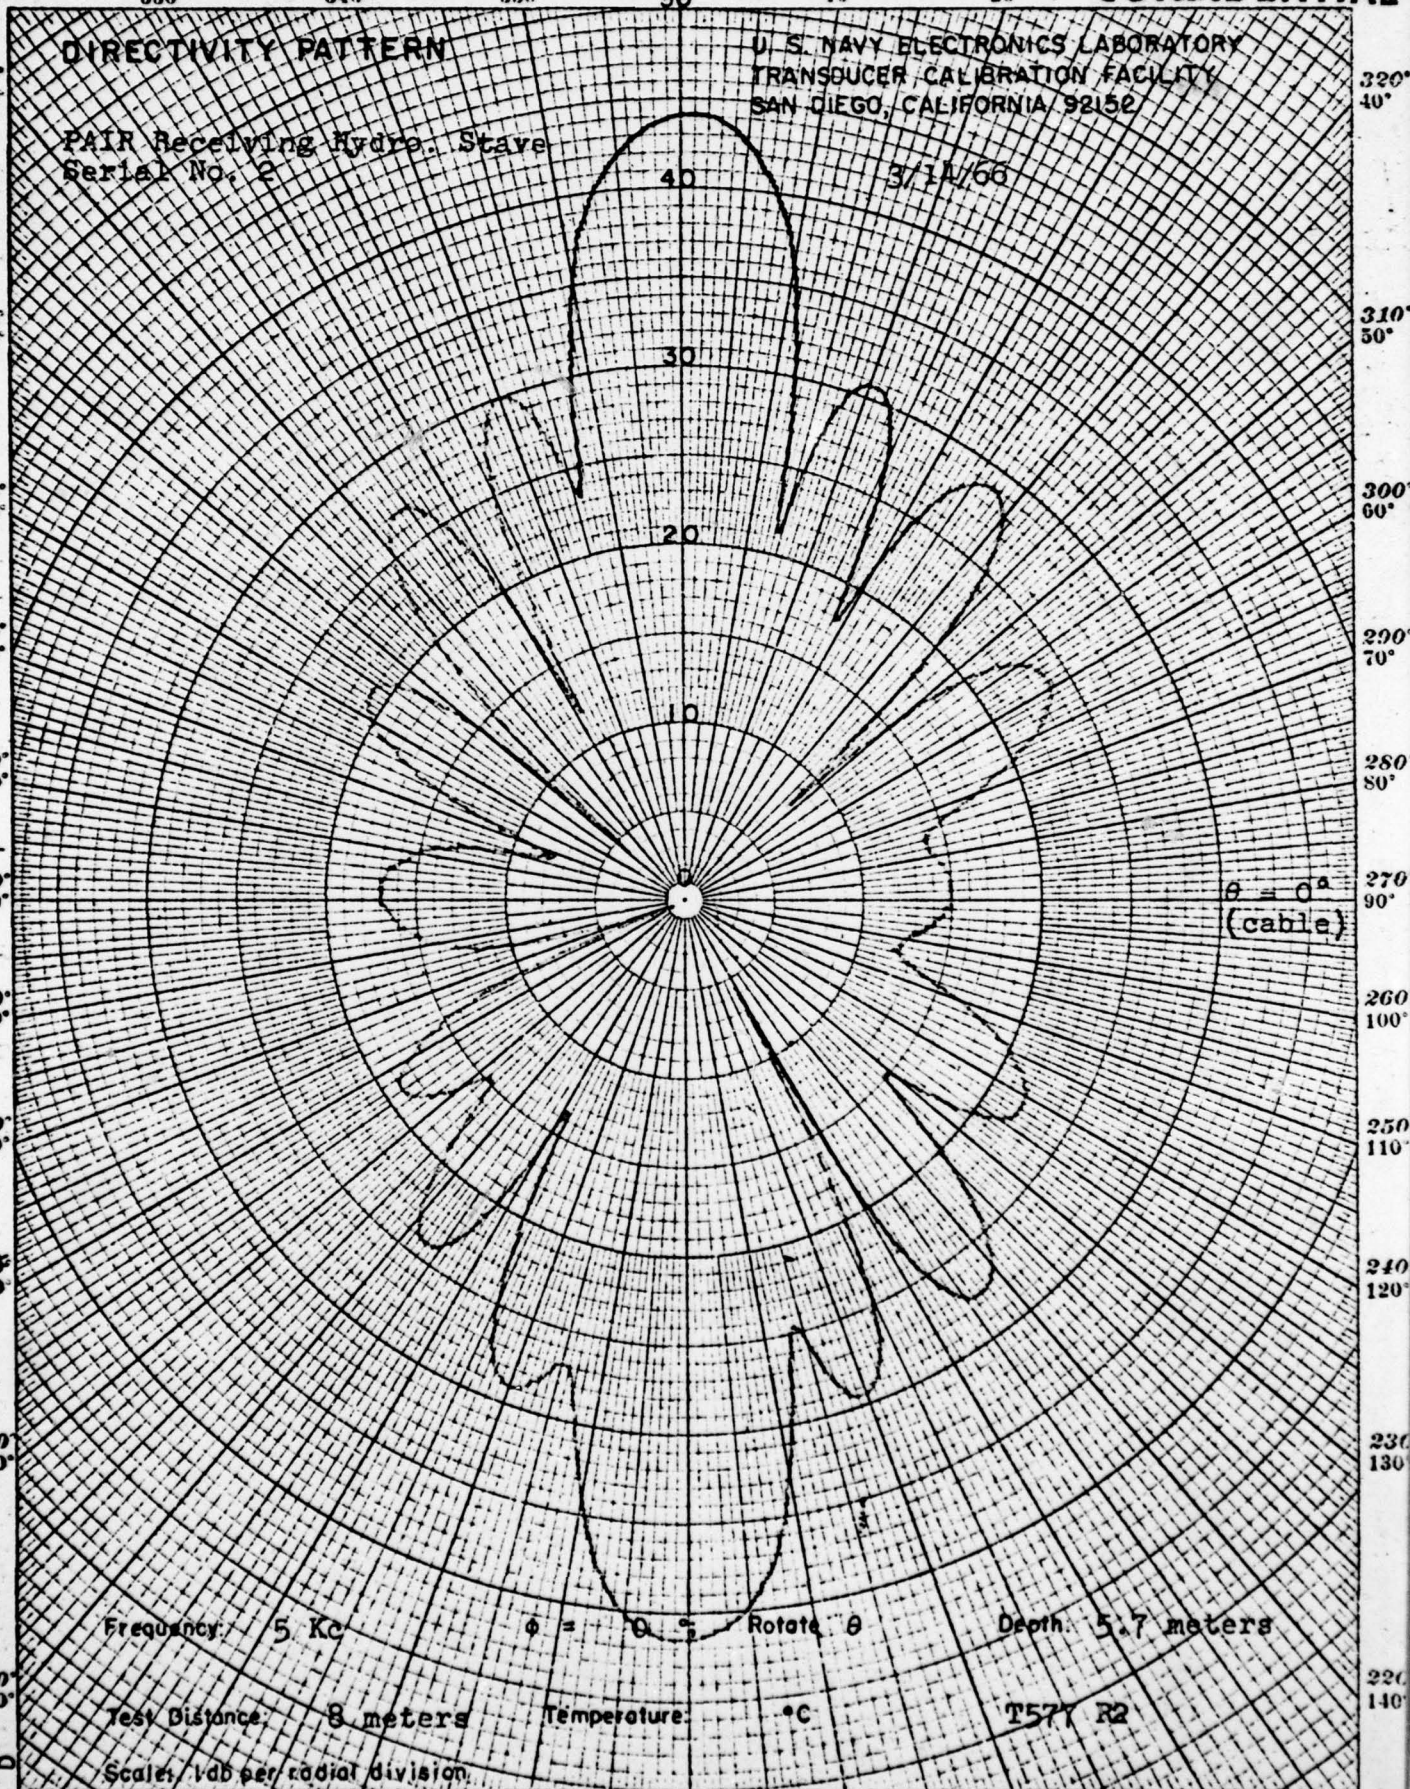

1110-NO-2900/22 (REV 7-64)

170°
160°180°
180°190°
170°200°
160°

CONFIDENTIAL 8

UNCLASSIFIED
~~CONFIDENTIAL~~

Measured at TRANSDEC
14 March 1966


U.S. NAVY ELECTRONICS LABORATORY
Transducer Calibration Facility
San Diego, California 92152

COMPLEX IMPEDANCE of PAIR, Receiving Hydrophone S/N 2

Series Measurement

Measured at the end of
approximately 50' - 4
Conductor Shield with cable
Temperature: 14°C
Depth: 5.7 meters

Solid curve: R
Dotted curve: $-X$

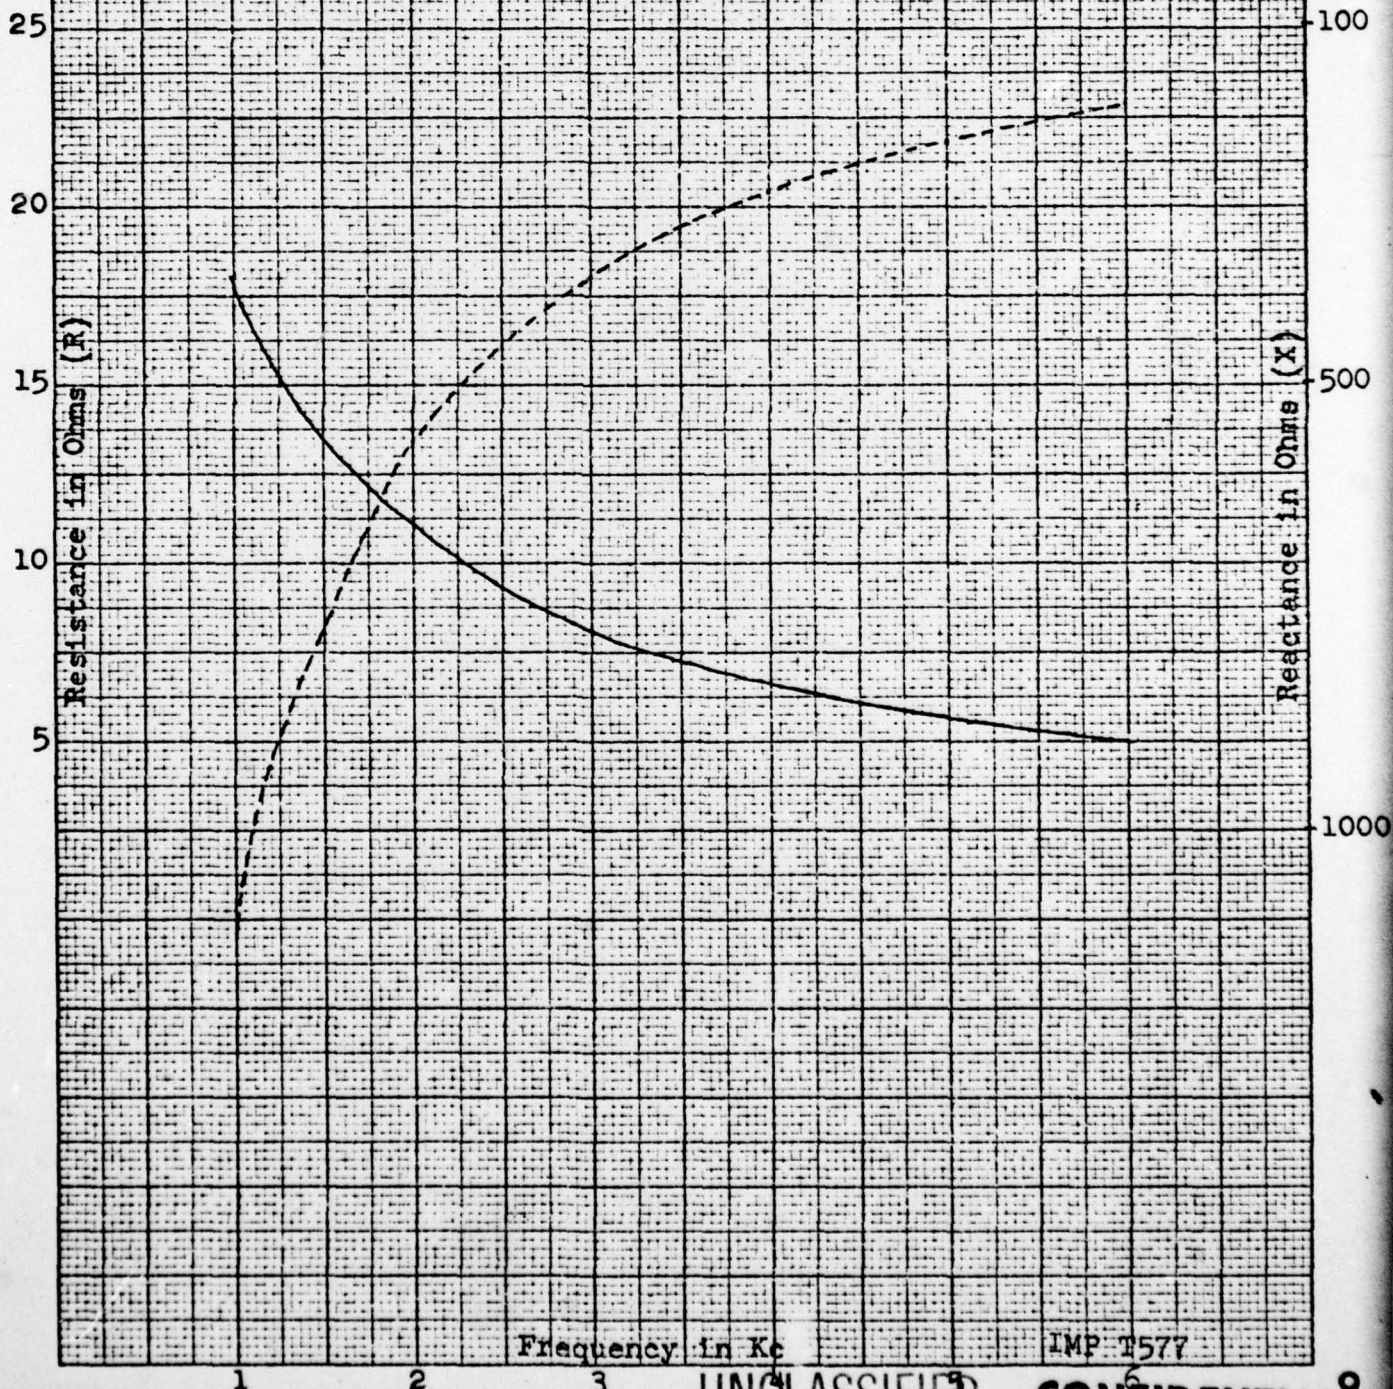

K&E 10 x 10 to 1 1/2 INCH
7 x 10 IN - ALUMINUM
46 1327
MADE IN U.S.A.
KEUFFEL & ESSER CO.

Frequency in Kc

IMP T577

UNCLASSIFIED

~~CONFIDENTIAL~~ 9

UNCLASSIFIED

~~CONFIDENTIAL~~

0810-608029

TM-1053

INITIAL DISTRIBUTION LIST (U)

NAVY ELECTRONICS LABORATORY

CODE 2140 (T. H. Grogg)

CODE 2140 (R. D. Isaak)

CODE 3160 (D. A. Pierce)

CHIEF OF NAVAL MATERIAL

PMS-86 (2)

10

~~CONFIDENTIAL~~

UNCLASSIFIED

